



Tools for cable installation, hand tools



C130L

Hand operated hydraulic crimping tool

Crimping range: 10-300 mm²
 Length: 580 mm
 Weight: 6500 g
 Maximal pressing force: 130 kN

Maximal head hole: 38 mm
 Head can be opened and/or twisted in 320°

Accessories:
 • Plastic suitcase

Optional accessories:
 • 14 pair dies 10-400 mm²



RELEVANT STANDARD

EN 792-1

Dies for C130L crimping tools

Tracon code	Die marking	Cu wires (mm ²)	Al wires (mm ²)
C130L-10	KZ 6	10	6
C130L-16	KZ 8	16	10
C130L-25	KZ 10	25	16
C130L-35	KZ 12	35	25
C130L-50	KZ 14	50	35
C130L-70	KZ 16	70	50
C130L-95	KZ 18	95	70
C130L-120	KZ 20	120	95
C130L-150	KZ 22	150	120
C130L-185	KZ 25	185	150
C130L-240	KZ 28	240	185
C130L-240K*	KZ 28	240	185
C130L-300	KZ 32	300	240
C130L-400	KZ 34	400	300

Dies for C130L crimping tools

* Pre-rounding die for cables with sector cross-sector



HX-3.5

Steel wire cutting and crimping tool



Max. steel wire diameter: 4 mm
 Length: 360 mm
 Weight: 940 g

RELEVANT STANDARD

EN 50109-1

Size harmonization table for HX-3.5 tool

Marking	Diameter (mm)	Diameter (inch)	OS marking
1	1,58	1/16	OS-1A
	2,00	5/64	OS-1B
2	2,38...2,5	3/32	OS-2A
	2,78	7/64	OS-2B
3	3,0...3,17	1/8	OS-3A
	3,5	-	OS-3B

HKS-15 Hydraulic pull-up press and cutting tool



This tool serves for cutting circular holes in the side plates of metal boxes, by using the standard three-blade cutting dies, delivered as accessories.

Upon special order, dies adapted for installation of packing glands of the PG series are available.

Pressing force: 15 metric tons
 Cutting deepness: 1.6 – 3.2 mm
 Weight: 6.2 kg
 Die sizes:

- 1/2" (21,8 mm);
- 1" (34,1 mm);
- 1.5" (48,7 mm);
- 3/4" (27,6 mm);
- 1.25" (42,7 mm);
- 2" (60,5 mm)

RKV325

Copper and aluminium cable cutter tool



Max. cutting cross-section: 325 mm²
 Max. cutting diameter: 35 mm
 Length: 240 mm
 Weight: 1000 g

RELEVANT STANDARD

ISO 5743

RKV500

Copper and aluminium cable cutter tool



Max. cutting cross-section: 500 mm²
 Max. cutting diameter: 40 mm
 Length: 240 (290) mm
 Weight: 1200 g

RELEVANT STANDARD

ISO 5743



B/8

Tracon Budapest Ltd. • Pallag Street 23, Dunakeszi, H-2120, Hungary

Tel.: +36-27-540-000, Fax: +36-27-540-005 • Website: www.traconelectric.com • E-mail: tracon@tracon.hu



Hand tools




RKV1000

Geared cable cutting tool for copper and aluminium cables

Maximum cutting cross-section: 1000 mm²
 Maximum cable diameter: 95 mm
 Length: 530 (725) mm
 Weight: 6300 g

RELEVANT STANDARD
EN 792-1

+ suitcase

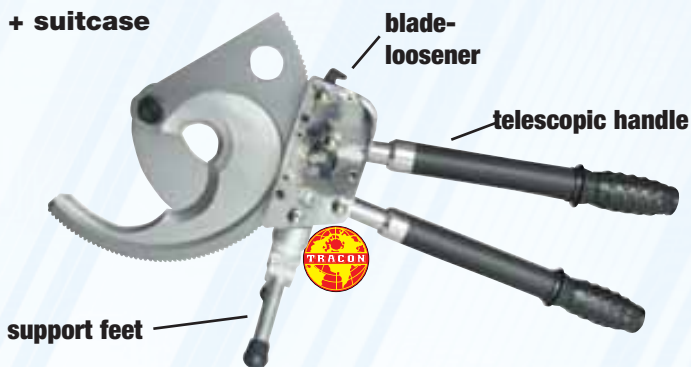

CC22

Copper and aluminium cable cutter tool

Max. cutting cross-section: 25 mm²
 Max. cutting diameter: 5,5 mm
 Length: 165 mm
 Weight: 210 g



CC38

Copper and aluminium cable cutter tool

Max. cutting cross-section: 35 mm²
 Max. cutting diameter: 6,5 mm
 Length: 215 mm
 Weight: 350 g



CC60

Copper and aluminium cable cutter tool

Max. cutting cross-section: 50 mm²
 Max. cutting diameter: 8 mm
 Length: 235 mm
 Weight: 410 g



CC80

Copper and aluminium cable cutter tool

Max. cutting cross-section: 70 mm²
 Max. cutting diameter: 9 mm
 Length: 310 mm
 Weight: 750 g



CC250

Copper and aluminium cable cutter tool

Max. cutting cross-section: 100 mm²
 Max. cutting diameter: 15 mm
 Length: 320 mm
 Weight: 500 g




RELEVANT STANDARD
ISO 5743

CC250

Copper and aluminium cable cutter tool

Max. cutting cross-section: 250 mm²
 Max. cutting diameter: 17 mm
 Length: 600 mm
 Weight: 1750 g




RELEVANT STANDARD
ISO 5743

CC500

Copper and aluminium cable cutter tool

Max. cutting cross-section: 500 mm²
 Max. cutting diameter: 25 mm
 Length: 800 mm
 Weight: 2850 g

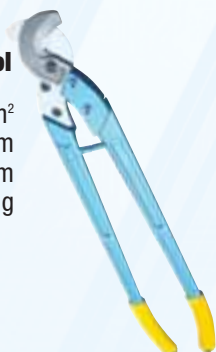

RELEVANT STANDARD
ISO 5743

SCC60

Copper and aluminium cable cutter tool

Max. cutting cross-section:
 At Cu and Al cable: 50 mm²
 At steel cable: 6 mm²
 Length: 235 mm
 Weight: 0,7 kg
 Max. cutting diameter:
 At Cu and Al cable: 8 mm
 At steel cable: 3 mm



Hand tools




MCC-CV

Mini wire cutter

- chrome vanadium head
- aluminum handle with plastic grip
- security hook and spring
- For cutting Cu, Al and steel
- Max. cutting diameter: 4 mm
- Length: 215mm
- Weight: 200 g

RELEVANT STANDARD

ISO 5743



MCC-T

Mini wire cutter

- titan head
- aluminum handle with plastic grip
- For cutting Cu, Al and steel
- Max. cutting diameter: 4 mm
- Length: 215mm
- Weight: 200 g

RELEVANT STANDARD

ISO 5743



TCC-AC

Cutting tool with transmission

- hardened steel cutting edges
- safety pin
- steel grip
- for Cu, Al and soft steel
- Max. cutting diameter: 5 mm
- length: 280 mm
- weight: 425 g

RELEVANT STANDARD

ISO 5743



TCC-AL

Cutting tool with transmission

- hardened steel cutting edges
- safety pin
- aluminium grip
- for Cu, Al and soft steel
- Max. cutting diameter: 5 mm
- length: 280 mm
- weight: 225 g

RELEVANT STANDARD

ISO 5743




SP140R

Long nosed, pointed mechanic pliers

Length: 140 mm
Weight: 60 g

RELEVANT STANDARD

ISO 5743




SP140F

Long nosed, flat, direct mechanic pliers

Length: 140 mm
Weight: 60 g

RELEVANT STANDARD

ISO 5743



SP115N

Cutting nipper mechanic pliers

Length: 115 mm
Weight: 50 g

RELEVANT STANDARD

ISO 5743




SP125R

Short nosed, flat, pointed mechanic pliers

Length: 125 mm
Weight: 50 g

RELEVANT STANDARD

ISO 5743



SP135B

Long nosed, curved mechanic pliers

Length: 135 mm
Weight: 60 g

RELEVANT STANDARD

ISO 5743



CSF

Cutting nippers



Tracon code	Length (mm)	Weight (g)
CSF-6	165	200
CSF-7	180	250



B/10

Hand tools

KF-1000

Insulated combined pliers up to 1000 V

Length: 185 mm
Weight: 360 g



RELEVANT STANDARD

EN 60900

KFK3-1000

Insulated pliers set up to 1000 V

Combined pliers: 185 mm
Pointed, long nosed pliers: 185 mm
Cutting nipper: 165 mm



RELEVANT STANDARD

EN 60900

SZ type insulated screwdrivers



Tracon code	Type, dimensions
SZ375F	normal, 3×75 mm
SZ4100F	normal, 4×100 mm
SZ5125F	normal, 5×125 mm
SZ6100F	normal, 6×100 mm
SZ6125F	normal, 6×125 mm
SZ6150F	normal, 6×150 mm
SZ375S	Philips, 3×75 mm
SZ4100S	Philips, 4×100 mm
SZ5125S	Philips, 5×125 mm
SZ6100S	Philips, 6×100 mm
SZ6125S	Philips, 6×125 mm
SZ6150S	Philips, 6×150 mm

SD type insulated screwdrivers



Tracon code	Type, dimensions
SD375F	normal, 3×75 mm
SD4100F	normal, 4×100 mm
SD5125F	normal, 5×125 mm
SD6100F	normal, 6×100 mm
SD6125F	normal, 6×125 mm
SD6150F	normal, 6×150 mm
SD375S	Philips, 3×75 mm
SD4100S	Philips, 4×100 mm
SD5125S	Philips, 5×125 mm
SD6100S	Philips, 6×100 mm
SD6125S	Philips, 6×125 mm
SD6150S	Philips, 6×150 mm

TG007

Cable tie stretcher and cutting hand tool

Cutting width: 2.2-8 mm
Weight: 220 g
Adjustable stretching force



TG008

Cable tie stretcher and cutting hand tool

Cutting width: 2.2-4.8 mm
Weight: 300 g
Adjustable stretching force



TG010

Cable tie stretcher and cutting hand tool

Cutting width: 3.6-13 mm
Weight: 380 g
Adjustable stretching force



TEST

Riveting tool

For SZ6, SZ8, SZ8/6 plastic rivets


Weight: 180 g

F6 Riveting tool head

For SZ6
Weight: 70 g

F8 Riveting tool head

For SZ8 and SZ8/6
Weight: 70 g



Tracon code	d×l (mm)	L (mm)
SZ6	6×25	49.5
SZ6/30	6×30	59

Tracon code	d×l (mm)	L (mm)
SZ8	8×30	59.8
SZ8/6	8×60	90.7

